
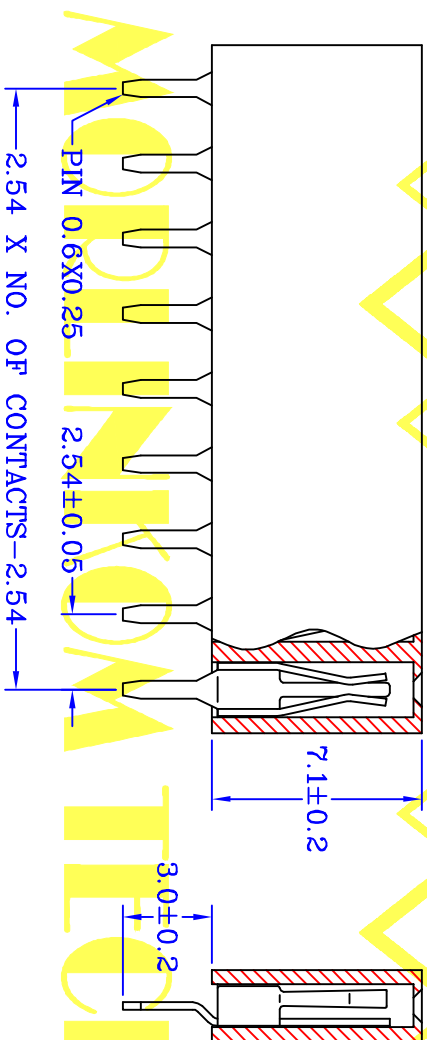


2.54 X NO. OF POSITIONS±0.38

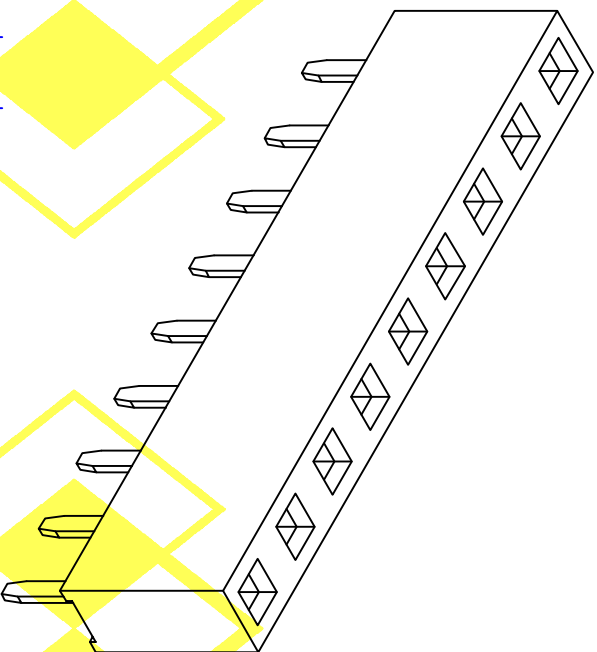

2.54 X NO. OF CONTACTS-2.54

MORLINTOM TECHNOLOGY LTD.

SPECIFICATIONS

ELECTRICAL

- Contact Current Rating : 3 Amperes
 - Contact Resistance : 20 mΩ Max
 - Insulator Resistance : 5,000 MΩ Min
- MATERIAL**
- Di electric W/ thstanding Vol tage : 500 V AC RMS 60 Seconds
 - Insulator : PBT UL 94V-0
 - Contact : Brass
 - Contact Plated : Gold Plated , Tin Plated , Selective Plated
- Operation Temperature : - 40°C to + 105°C

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY MORLINKOM TECHNOLOGY LTD
 三川精密電子有限公司 魔林科技有限公司
 TEL:886-2-2686-8788 FAX:886-2-2686-0018
 E-MAIL: Centron@tpts6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY
 核對 CHECKED BY
 FU-FU WENDY

日期 DATE
 比例 SCALE
 2011/03/25 1:1

PFS1XXGB107

圖號 DRAWING NO.
200-XX-07