


5.0±0.1


2.54 X NO. OF POSITIONS+0.50±0.25

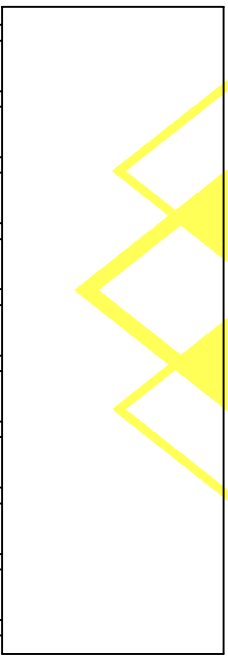

PIN 0.6x0.4

2.54±0.05


2.54 X NO. OF CONTACTS-2.54±0.1



8.5±0.2

10.0±0.2

2.54±0.05

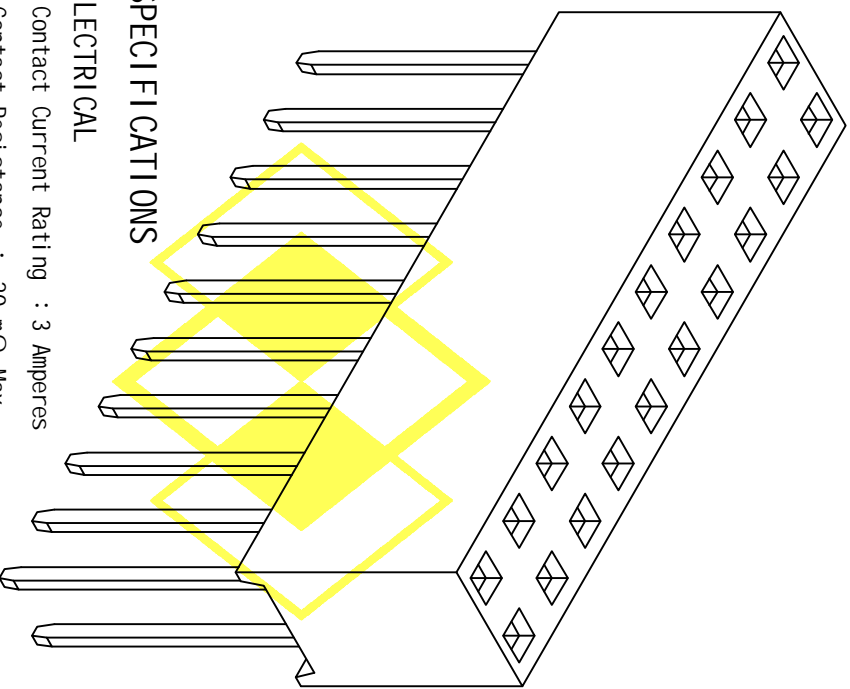

**SPECIFICATIONS**

**ELECTRICAL**

- Contact Current Rating : 3 Amperes
  - Contact Resistance : 20 mΩ Max
  - Insulator Resistance : 5,000 MΩ Min
  - Dielectric Withstanding Voltage : 500 V AC RMS 60 Seconds
- MATERIAL**
- Insulator : PBT UL 94V-0
  - Contact : Brass
  - Contact Plated : Gold Plated , Tin Plated , Selective Plated
- Operation Temperature : - 40°C to + 105°C

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

MORLINKOM TECHNOLOGY LTD

三川精密電子有限公司

魔林科技有限公司

TEL:886-2-2686-8788

FAX:886-2-2686-0018

E-MAIL: Centron@tpts6.seed.net.tw

E-MAIL: Cen8888@gmail.com

繪圖

DRAWN BY

FUFU

日期

2009/09/09

核對

CHECKED BY

WENDY

比例

SCALE

1:1

DFS2XXGB1L10

圖號

210-XX-03

DRAWING NO.