
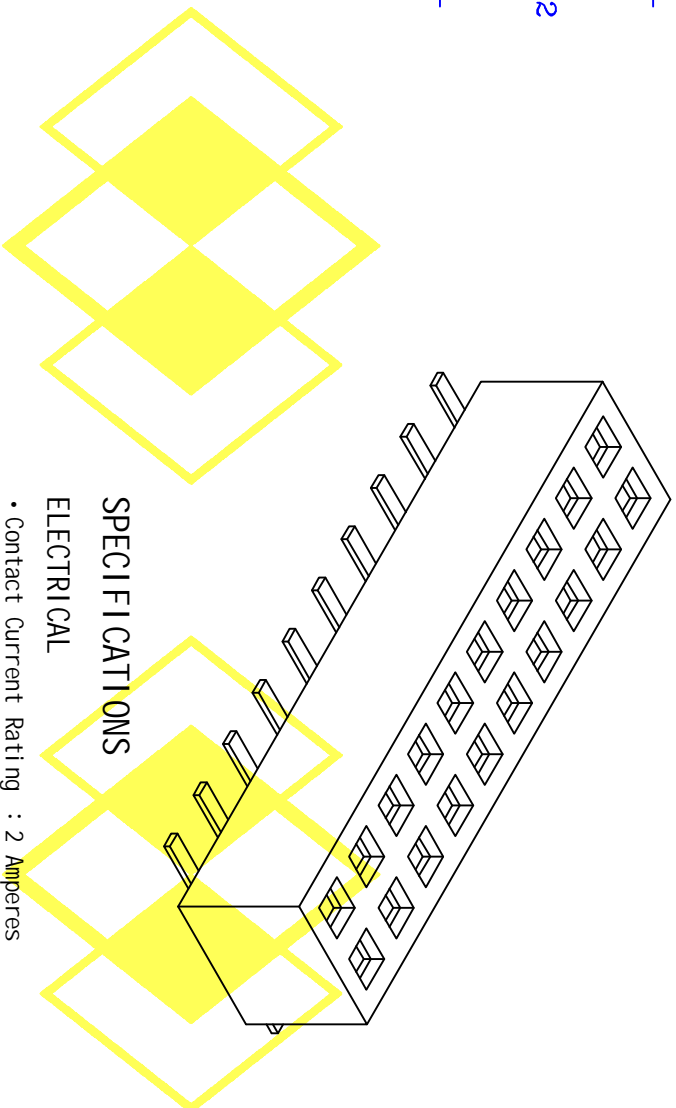


**PCB LAYOUT**

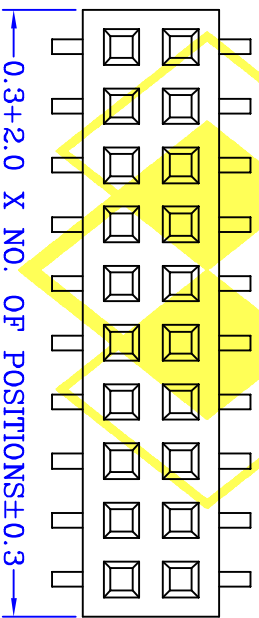



**SPECIFICATIONS  
ELECTRICAL**

- Contact Current Rating : 2 Amperes
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 1,000 MΩ Min
- Dielectric Withstanding Voltage : 500 V AC RMS 60 Seconds

**MATERIAL**

- Insulator : Nylon-6T
  - Contact : Brass
  - Contact Plated : Gold Plated , Tin Plated , Selective Plated
- Operation Temperature : - 40°C to + 105°C

UNIT : mm

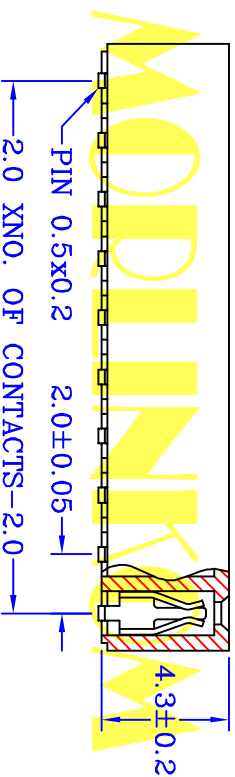

**CENTRONIC PRECISION ELECTRONIC COMPANY** MORLINSKOM TECHNOLOGY LTD

三川精密電子有限公司 魔林科技有限公司

TEL:886-2-2686-8788 FAX:886-2-2686-0018

E-MAIL: Centron@tpts6.seed.net.tw E-MAIL: Cen88888@gmail.com

繪圖	DRAWN BY	日期	DATE
核對	CHECKED BY	比例	SCALE
FUFU	WENDY	1:1	

**SHPFS2XXGB1**

圖號 **893-XX**  
DRAWING NO.