


SPECIFICATIONS

ELECTRICAL



- Contact Current Rating : 1 Ampere
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 1,000 MΩ Min
- Di electric Withstanding Voltage : 300 V AC RMS 60 Seconds

MATERIAL

- Insulator : Nylon-6T
- Contact : Brass
- Contact Plated : Gold Plated , Tin Plated , Selective Plated
- Operation Temperature : - 40°C to + 105°C

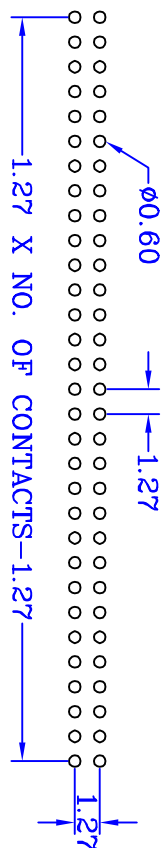

PCB LAYOUT

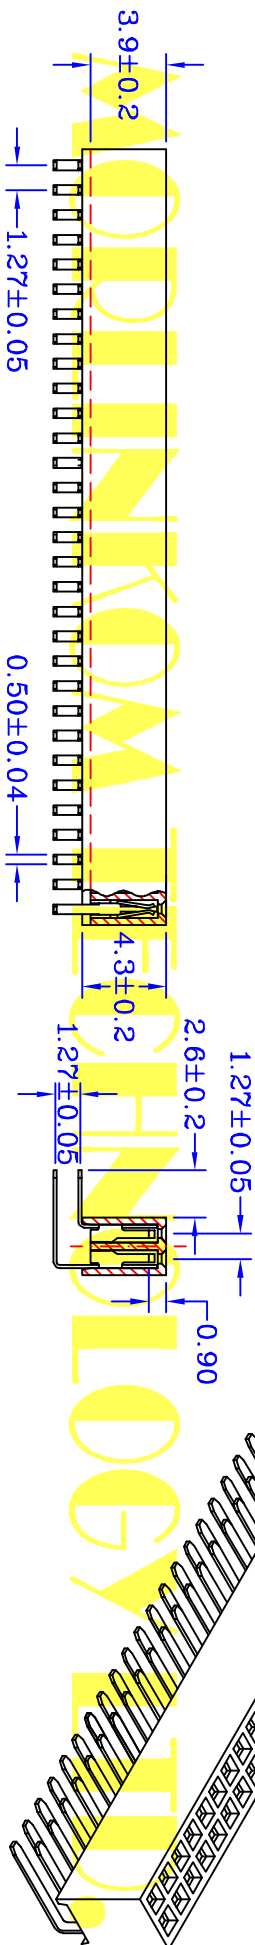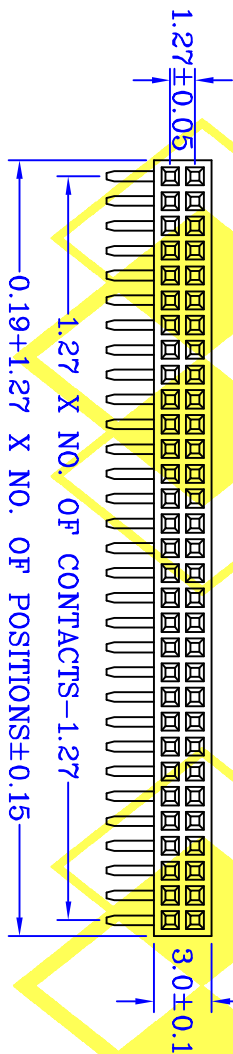

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

三川精密電子有限公司

TEL:886-2-2686-8788

FAX:866-2-2686-0018

E-MAIL: Centron@pts6.seed.net.tw

MORLINKOM TECHNOLOGY LTD

魔林科技有限公司

FAX:866-2-2686-0018

E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY

FUFU

日期 DATE

2009/10/09

HPPFR2XXGB1H

圖號

888-50-H

核對 CHECKED BY

WENDY

比例 SCALE

1:1

DRAWING NO.

888-50-H