


**SPECIFICATIONS**  
**ELECTRICAL**

- Contact Current Rating : 1 Amperes
- Contact Resistance : 15 mΩ Max
- Insulator Resistance : 5,000 MΩ Min
- Dielectric Withstanding Voltage : 500 V AC RMS 60 Seconds

**MATERIAL**

- Insulator : Nylon-6T , UL 94-0
- Contact : Brass
- Contact Plated : Gold Plated , Tin Plated , Selective Plated
- Operation Temperature : - 40°C to + 105°C

P	3.0	2.5	2.0	1.7	1.5	1.0
---	-----	-----	-----	-----	-----	-----

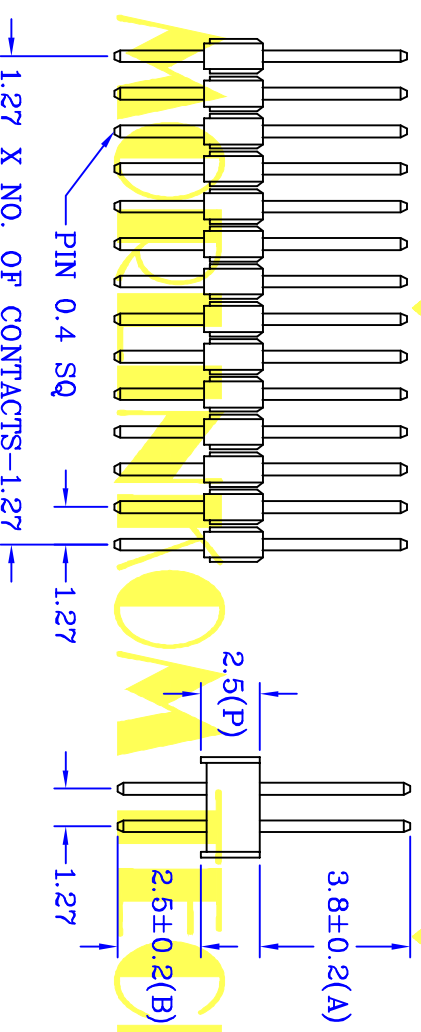

UNIT : mm

MORLINTKON TECHNOLOGY LTD.

**CENTRONIC PRECISION ELECTRONIC COMPANY** MORLINTKON TECHNOLOGY LTD

三川精密電子有限公司 魔林科技有限公司  
 TEL:886-2-2686-8788 FAX:886-2-2686-0018  
 E-MAIL: Centron@tpsts6.seed.net.tw E-MAIL: Cen88888@gmail.com

繪圖	DRAWN BY	日期	DATE
核對	CHECKED BY	比例	SCALE
FUFU	WENDY	1:1	

HHPHS2XXGB1HXX

圖號 **866-XX-HXX**  
DRAWING NO.