




PCB LAYOUT

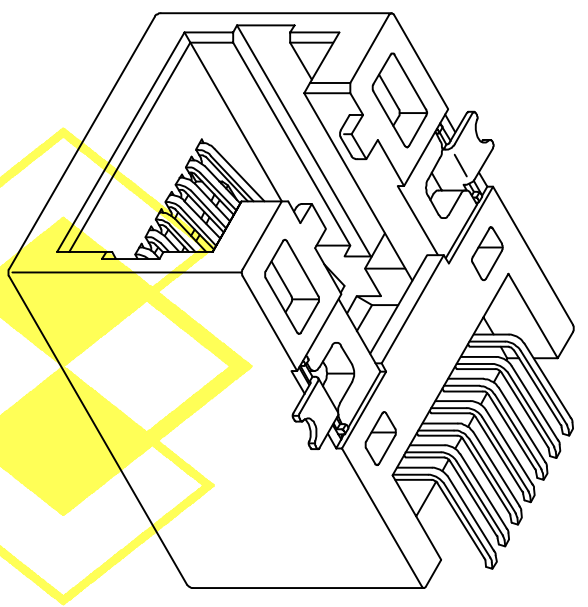

SPECIFICATIONS
ELECTRICAL

- Contact Current Rating : 1 Ampere
 - Contact Resistance : 30 mΩ Max
 - Insulator Resistance : 500 MΩ Min
 - Dielectric Withstanding Voltage : 500V AC RMS 60 Seconds
 - Operating Voltage : 150V AC Max
- MATERIAL
- Insulator : Thermoplastic UL94V-0
 - Contact : 0.35mm Thickness Phosphor Bronze
 - Contact Plated : Gold Plated And Tin In Solder Area

UNIT : mm

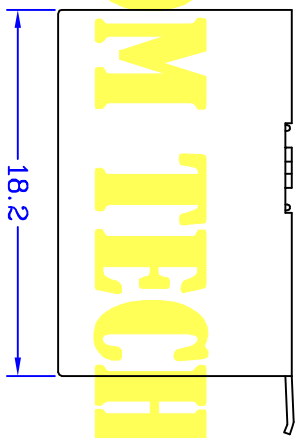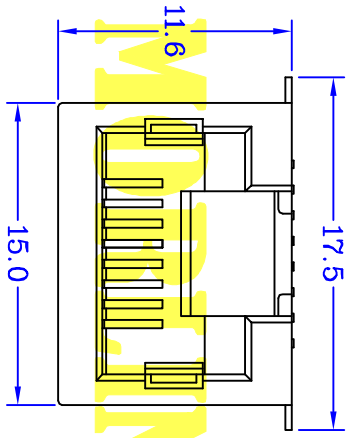

CENTRONIC PRECISION ELECTRONIC COMPANY
三川精密電子有限公司
TEL:886-2-2686-8788
E-MAIL: Centron@tpts6.seed.net.tw

MORLINKOM TECHNOLOGY LTD
魔林科技有限公司
FAX:886-2-2686-0018
E-MAIL: Cen8888@gmail.com

繪圖	DRAWN BY	日期	DATE
核對	CHECKED BY	比例	SCALE
FUFU	WENDY	1:1	

SRJ45R8P8CB1#1

圖號 850-40
DRAWING NO.