

**SPECIFICATIONS**

**ELECTRICAL**

- Contact Current Rating : 1.5 Amperes
- Contact Resistance : 30 mΩ Max
- Insulator Resistance : 1000MΩ Min
- Di electric Withstanding Voltage : 500 V AC RMS 60 Seconds
- Operating Voltage : 150V AC Max


**MATERIAL**

- Insulator : PBT UL94V-0
- Contact : Phosphor Bronze
- Contact Plated : Gold Plated , Tin Plated , Selective Plated
- Shield : Nickel Plated Brass Alloy

**MECHANICAL**

- Insertion Force : 35Newtons Max
- Extraction Force : 10Newtons Min
- Durability(life test) : 1500 cycles

UNIT : mm

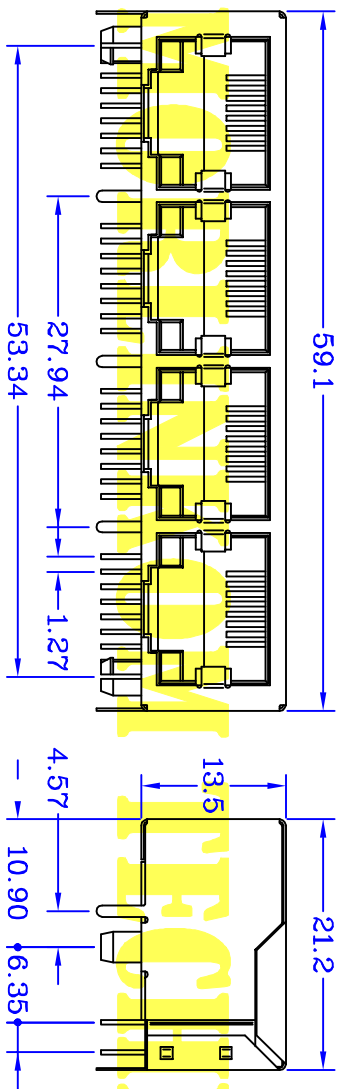

**CENTRONIC PRECISION ELECTRONIC COMPANY** MORLINKOM TECHNOLOGY LTD  
 三川精密電子有限公司 魔林科技有限公司  
 TEL:886-2-2686-8788 FAX:886-2-2686-0018  
 E-MAIL: Centron@tpts6.seed.net.tw E-MAIL: Cen88888@gmail.com

繪圖	DRAWN BY	日期	DATE
核對	CHECKED BY	比例	SCALE
FUFU	WENDY	1:1	

RJ45DR08PC1X4GB1#1C

圖號 851-18  
 DRAWING NO.