
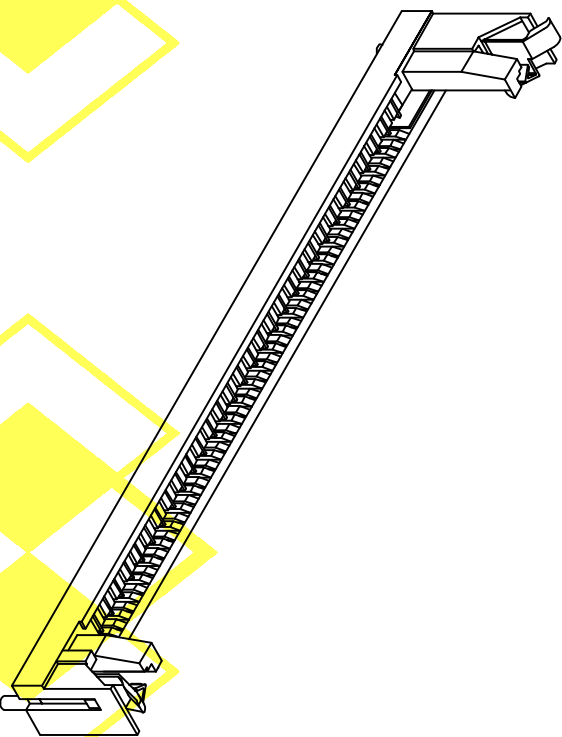


PCB LAYOUT

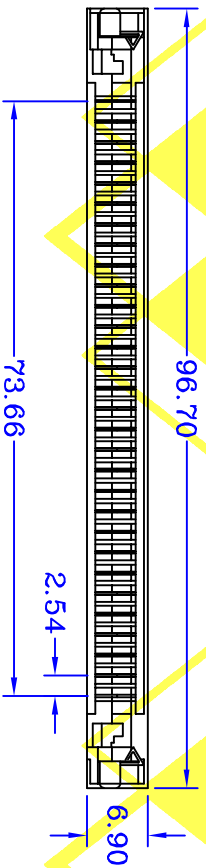

SPECIFICATIONS
ELECTRICAL


- Contact Current Rating : 1 Amper
- Contact Resistance : 20 m Ω Max
- Insulator Resistance : 1,000 M Ω Min
- Dielectric Withstanding Voltage : 250 VAC RMS 60 sec.

MATERIAL

- Insulator : LCP : UL 94V-0
- Contact : Phosphor Bronze
- Contact Plated : Gold Plated / Tin Plated

Operation Temperature : - 55°C to + 105°C

UNIT : mm

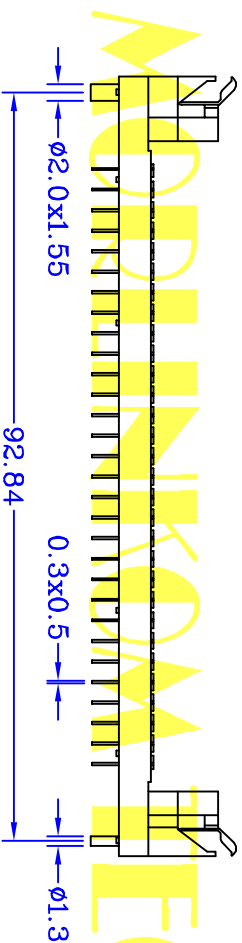

CENTRONIC PRECISION ELECTRONIC COMPANY

MORLINKOM TECHNOLOGY LTD

三川精密電子有限公司

魔林科技有限公司

TEL:886-2-2686-8788 FAX:866-2-2686-0018

E-MAIL: Centron@ipts6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖	DRAWN BY	日期	DATE
核對	CHECKED BY	比例	SCALE
FUFU	WENDY	2009/10/09	1:1

RMS130TB8

圖號 832-30
DRAWING NO.