











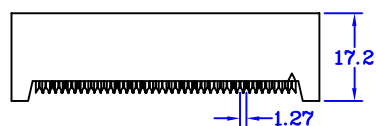


ORDERING INFORMATION

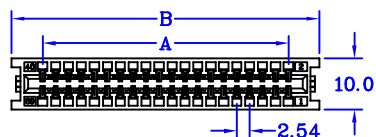

CEFXSBIAI CONTACTS	DIMENSION		
	A	B	C
10	10.16	22.36	13.04
14	15.24	27.44	18.12
16	17.78	29.98	20.66
20	22.86	35.06	25.74
26	30.48	42.68	33.36
34	40.64	52.84	43.52
40	48.26	60.46	51.14
50	60.98	73.16	63.84



Series

CEF : Edge Connector IDC Type Pitch 2.54mm

1. Number of Contacts 10 14 16 20 26 34 40 50

2. Plating Option
 S : Selective Plated (Standard)
 G : Gold Plated
 T : Tin Plated

3. Products Logo
 A : Custom-Made
 B : Without Logo (Standard)

4. Insulator Color
 1 : Black (Standard)

5. Special Function
 A1 : With Strain Relief
 B1 : Without Strain Relief

EXAMPLE : CEF 34 S B 1 A1

Edge Connector IDC Type Pitch 2.54mm
 34 Pin Selective Plated (G/T) Without Logo
 Insulator Color Black With Strain Relief

Mbrlinkom Technology Ltd.