

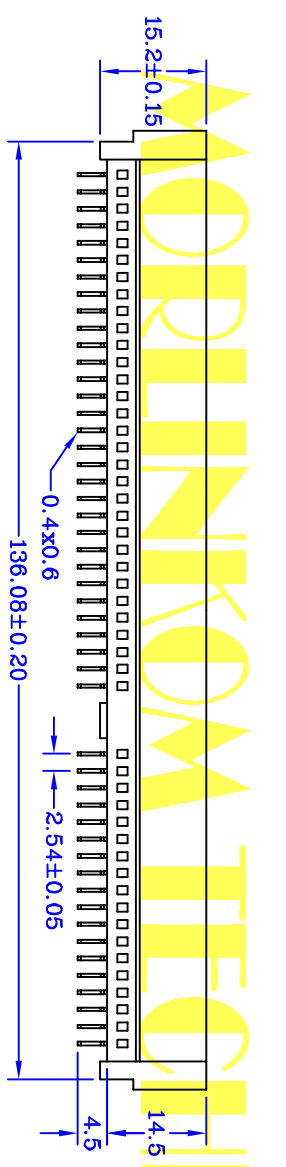


- ### SPECIFICATIONS
- #### ELECTRICAL
- Contact Current Rating : 3 Amperes
  - Contact Resistance : 20 mΩ Max
  - Insulator Resistance : 5,000 MΩ Min
  - Dielectric Withstanding Voltage : 1,000V AC RMS 60 Seconds
- #### MECHANICAL
- Insertion Force : 340 g Max / Per Pair
  - Extraction Force : 28 g Min / Per Pair
- #### MATERIAL
- Insulator : PBT, UL94V-0
  - Contact : Brass
  - Plated : Mating Area -- Gold Over Nickel  
Solder Area -- Tin Over Nickel
- Operation Temperature : - 55°C to + 105°C

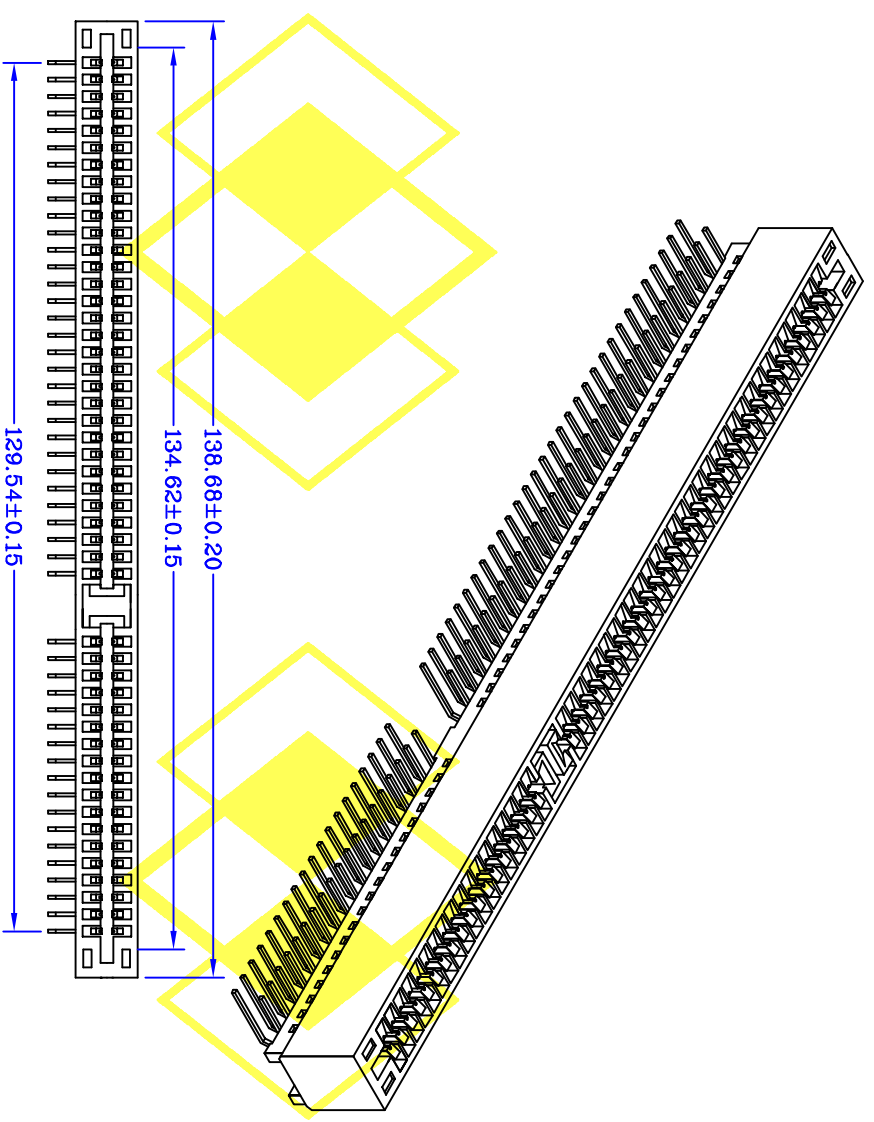

UNIT : mm

MORLINKOM TECHNOLOGY LTD.

CENTRONIC PRECISION ELECTRONIC COMPANY  
三川精密電子有限公司  
TEL:886-2-2686-8788 FAX:866-2-2686-0018  
E-MAIL: Centron@ipts6.seed.net.tw

MORLINKOM TECHNOLOGY LTD  
魔林科技有限公司  
E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY FU FU	日期 DATE 2009/09/25
核對 CHECKED BY WENDY	比例 SCALE 1:1

**ECR98SBI**

圖號  
DRAWING NO.  
**245-98**