

SPECIFICATIONS

ELECTRICAL

- Contact Current Rating : 1 Amperere
- Contact Resistance : 30 mΩ Max
- Insulator Resistance : 1,000 MΩ Min
- Dielectric Withstanding Voltage : 500V AC RMS 60 Seconds


MECHANICAL

- Insertion Force : 228 g Max / Per Pair
- Withdrawal Force : 28 g Min / Per Pair
- Mating Durability : 100 Cycles
- Contact Normal Force : 75 g Min / Pin

MATERIAL

- Insulator : PBT, UL94V-0 · Color White
- Contact : Brass
- Plated : Mating Area -- Gold Over Nickel
- Solder Area -- Tin Over Nickel

Operation Temperature : - 55°C to + 105°C

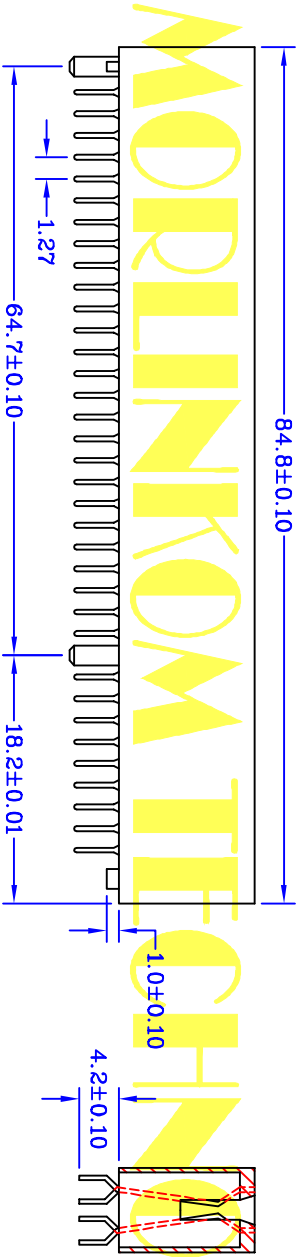

UNIT : mm

MORLINKOM TECHNOLOGY LTD.

CENTRONIC PRECISION ELECTRONIC COMPANY MORLINKOM TECHNOLOGY LTD

三川精密電子有限公司 魔林科技有限公司

TEL:886-2-2686-8788 FAX:866-2-2686-0018

E-MAIL: Centron@pts6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖	DRAWN BY	日期	DATE
核對	CHECKED BY	比例	SCALE
FUFU	WENDY	2009/10/02	1:1

PC1120TBAF

圖號 240-120-F
DRAWING NO.