

SPECIFICATIONS

ELECTRICAL

- Contact Current Rating : 1 Ampere
- Contact Resistance : 30 mΩ Max
- Insulator Resistance : 1,000 MΩ Min
- Dielectric Withstanding Voltage : 500 V AC RMS 60 Seconds
- Voltage Rating : 250V AC

MECHANICAL


- Insertion Force : 230 g Max / Per Pair
- Withdrawal Force : 15 g Min / Per Pair
- Retention Force : 460 g Min / Pin

MATERIAL

- Insulator : LCP, Color White
- Contact : Copper Alloy
- Plated : Mating Area -- Selected Gold Over Nickel
- Solder Area -- Tin Over Nickel

Operation Temperature : - 55°C to + 85°C

UNIT : mm

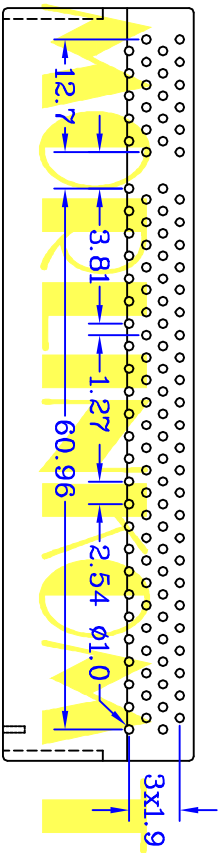

PCB LAYOUT

CENTRONIC PRECISION ELECTRONIC COMPANY MORLINKOM TECHNOLOGY LTD

三川精密電子有限公司 魔林科技有限公司

TEL:886-2-2686-8788 FAX:866-2-2686-0018

E-MAIL: Centron@pts6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖	DRAWN BY	日期	DATE
核對	CHECKED BY	比例	SCALE
FUFU	WENDY	1:1	

PCI120PTB4-L

圖號 245-120-PCI
DRAWING NO.