
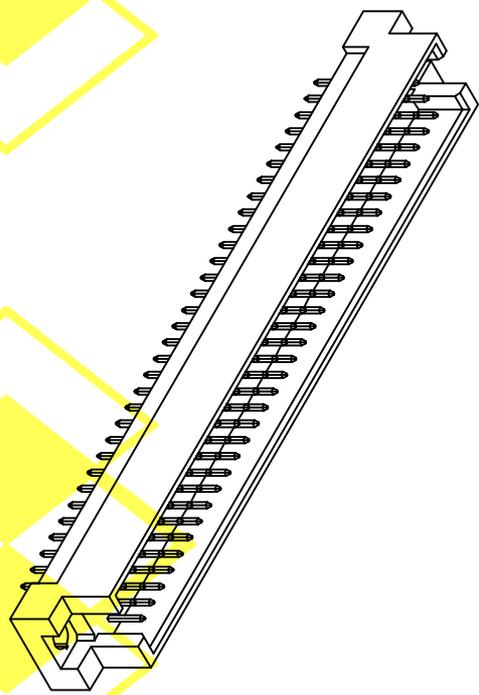



PCB LAYOUT

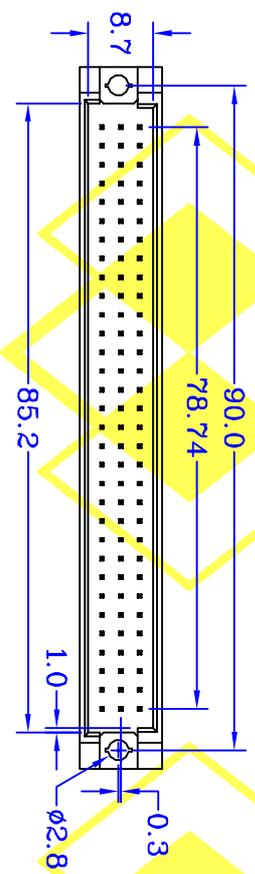

SPECIFICATIONS  
ELECTRICAL

- Contact Current Rating : 2 Amperes
  - Contact Resistance : 30 mΩ Max
  - Insulator Resistance : 1000 MΩ Min
  - Dielectric Withstanding Voltage : 1000 V AC RMS 60 Seconds
- MATERIAL
- Insulator : PBT UL 94V-0
  - Contact : Brass
  - Contact Plated : Selective Plated ( Dip Tin , Contact Gold )
- Operation Temperature : - 55°C to + 105°C

UNIT : mm

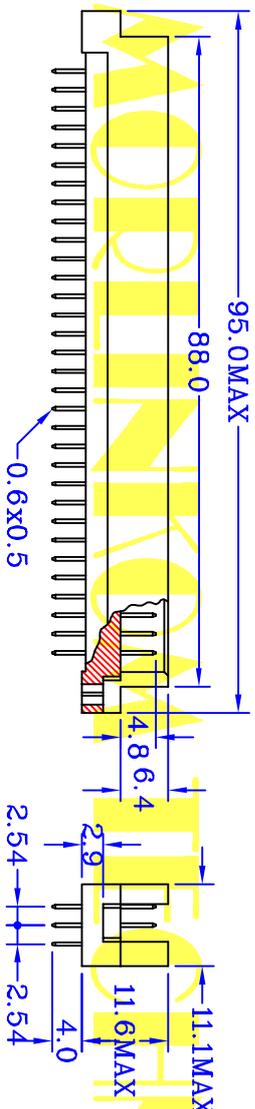

CENTRONIC PRECISION ELECTRONIC COMPANY MORLINKOM TECHNOLOGY LTD  
 三川精密電子有限公司 魔林科技有限公司  
 TEL:886-2-2686-8788 FAX:866-2-2686-0018  
 E-MAIL: Centron@ipts6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖	DRAWN BY	日期	DATE
核對	CHECKED BY	比例	SCALE
FUFU	WENDY	1:1	

DINSP396TB4

圖號 995-96P-C  
DRAWING NO.