
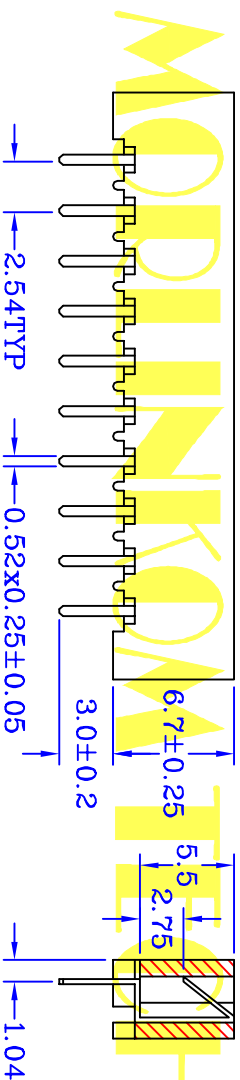


**MATERIAL**

- Insulator : Glass-Reinforced Thermoplastic.
- Contact : Phosphor Bronze.
- Plating : Tin Plated Over Nickel .

**SPECIFICATIONS**

- Voltage Rating : 250 VAC RMS.
- Contact Rating : 1 AMP.
- Dielectric Withstand Voltage : 1000 VAC RMS 60Hz For 1Min.
- Insulator Resistance : 5000mΩ Min At 500 VDC.
- Contact Resistance : 25 MΩ Max.
- Durability : 20 Cycles.

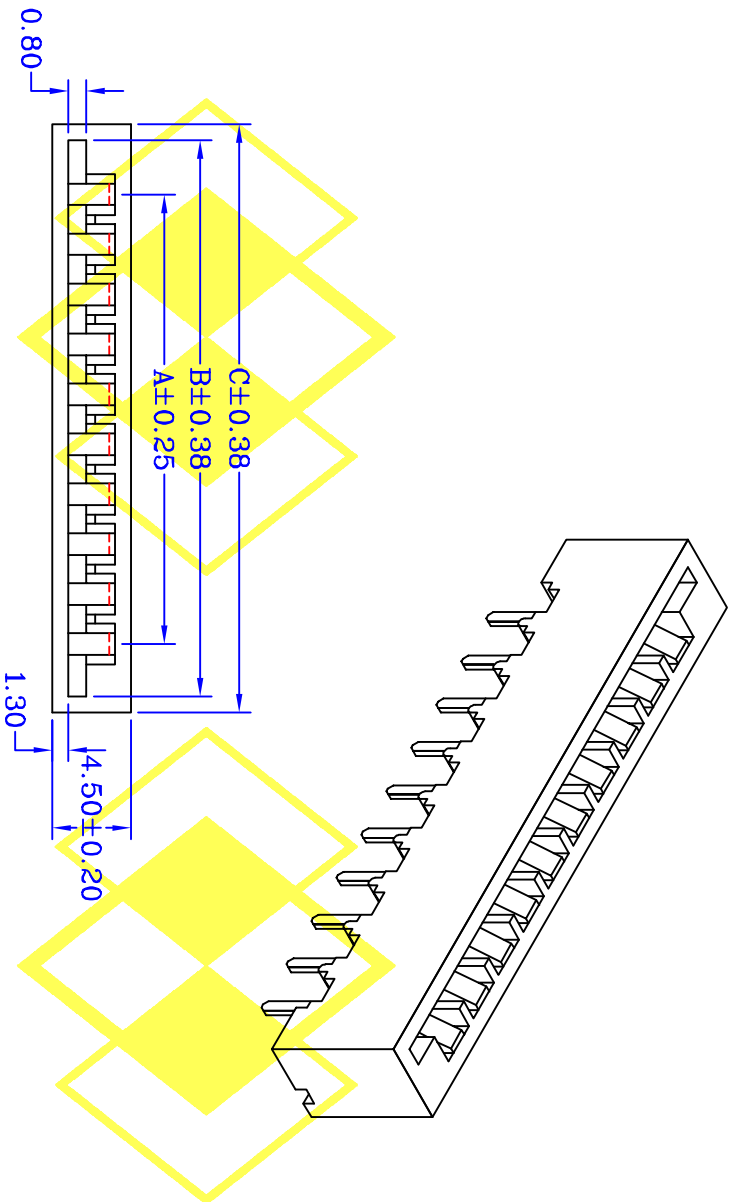

2.54PSSXXTB1NZ CONTACTS	A	B	C
2	2.54	8.43	10.54
3	5.08	10.97	13.08
4	7.62	13.51	15.62
5	10.16	16.05	18.16
6	12.70	18.59	20.70
7	15.24	21.13	23.24
8	17.78	23.67	25.78
9	20.32	26.21	28.32
10	22.86	28.75	30.86
11	25.40	31.29	33.40
12	27.94	33.83	35.94
13	30.48	36.37	38.48
14	33.02	38.91	41.02
15	35.56	41.45	43.56
16	38.10	43.99	46.10
17	40.64	46.53	48.64
18	43.18	49.07	51.18
19	45.72	51.60	53.72
20	48.26	54.15	56.26
21	50.80	56.69	58.80
22	53.34	59.23	61.34
23	55.88	61.77	63.88
24	58.42	64.31	66.42
25	60.96	66.85	68.96
26	63.50	69.39	71.50
27	66.04	71.93	74.04

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY

MORLINKOM TECHNOLOGY LTD

三川精密電子有限公司

魔林科技有限公司

TEL:886-2-2686-8788

FAX:886-2-2686-0018

E-MAIL: Centron@pts6.seed.net.tw

E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY

FUFU

日期 DATE

2011/03/09

2.54PSSXXTB1NZ

圖號

750-XX

核對 CHECKED BY

WENDY

比例 SCALE

1:1

DRAWING NO.