



**SPECIFICATIONS**

**ELECTRICAL**

- Contact Current Rating : 1 Amperes
- Contact Resistance : 15 mΩ Max
- Insulator Resistance : 5,000 MΩ Min
- Dielectric Withstanding Voltage : 500 V AC RMS 60 Seconds

**MATERIAL**

- Insulator : Nylon-6T , UL 94-0
- Contact : Brass
- Contact Plated : Gold Plated , Tin Plated , Selective Plated
- Operation Temperature : - 40°C to + 105°C

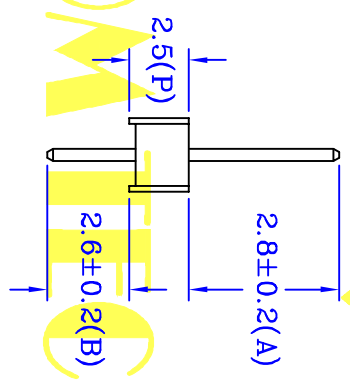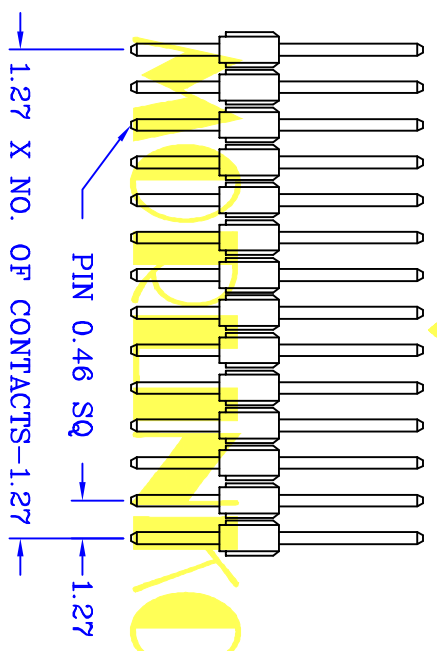

P	3.0	2.5	1.7
---	-----	-----	-----

A = mm

B = mm

UNIT : mm

**TECHNOLOGY LTD.**

**CENTRONIC PRECISION ELECTRONIC COMPANY** MORLINKOM TECHNOLOGY LTD

三川精密電子有限公司 魔林科技有限公司  
 TEL:886-2-2686-8788 FAX:886-2-2686-0018  
 E-MAIL: Centron@tpsts6.seed.net.tw E-MAIL: Cen88888@gmail.com

繪圖	DRAWN BY	日期	DATE
核對	FUFU	2009/03/10	
CHECKED BY	WENDY	比例	SCALE
		1:1	

**HPHS1XXGB1XX**

圖號 **865-XX-XX**  
DRAWING NO.