


### SPECIFICATIONS ELECTRICAL

- Contact Current Rating : 1 Amperes
  - Contact Resistance : 15 mΩ Max
  - Insulator Resistance : 5,000 MΩ Min
  - Dielectric Withstanding Voltage : 500 V AC RMS 60 Seconds
- MATERIAL**
- Insulator : Nylon-6T , UL 94-0
  - Contact : Brass
  - Contact Plated : Gold Plated , Tin Plated , Selective Plated
- Operation Temperature : - 40°C to + 105°C

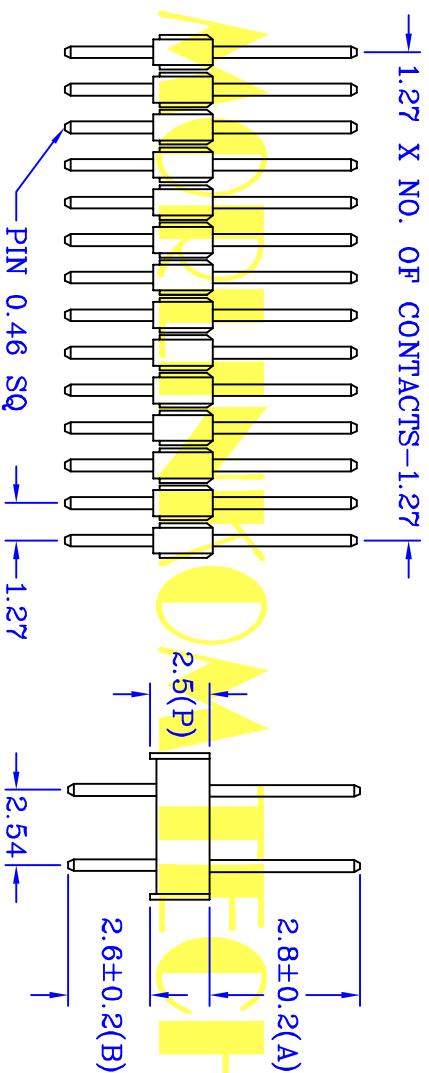

|   |     |     |     |
|---|-----|-----|-----|
| P | 3.0 | 2.5 | 1.7 |
|---|-----|-----|-----|

A =  $\frac{mm}{mm}$   
B =  $\frac{mm}{mm}$

UNIT : mm

CENTRONIC PRECISION ELECTRONIC COMPANY MORLIN KOM TECHNOLOGY LTD

三川精密電子有限公司 魔林科技有限公司

TEL: 886-2-2686-8788 FAX: 886-2-2686-0018

E-MAIL: Centron@tp6.seed.net.tw E-MAIL: Cen88888@gmail.com

|            |          |            |       |
|------------|----------|------------|-------|
| 繪圖         | DRAWN BY | 日期         | DATE  |
| 核對         | FUFU     | 2009/03/10 |       |
| CHECKED BY | WENDY    | 比例         | SCALE |
|            |          | 1:1        |       |

HPHS2XXGB1XX

圖號 866-XX-XX  
DRAWING NO.