


SPECIFICATIONS ELECTRICAL

- Contact Current Rating : 3 Amperes
 - Contact Resistance : 20 mΩ Max
 - Insulator Resistance : 5000 MΩ Min
 - Dielectric Withstanding Voltage : 500 V AC RMS 60 Seconds
- MATERIAL**
- Insulator : Nylon-6T · UL 94-0
 - Contact : Brass
 - Contact Plated : Gold Plated , Tin Plated , Selective Plated
- Operation Temperature : - 40°C to + 105°C

UNIT : mm

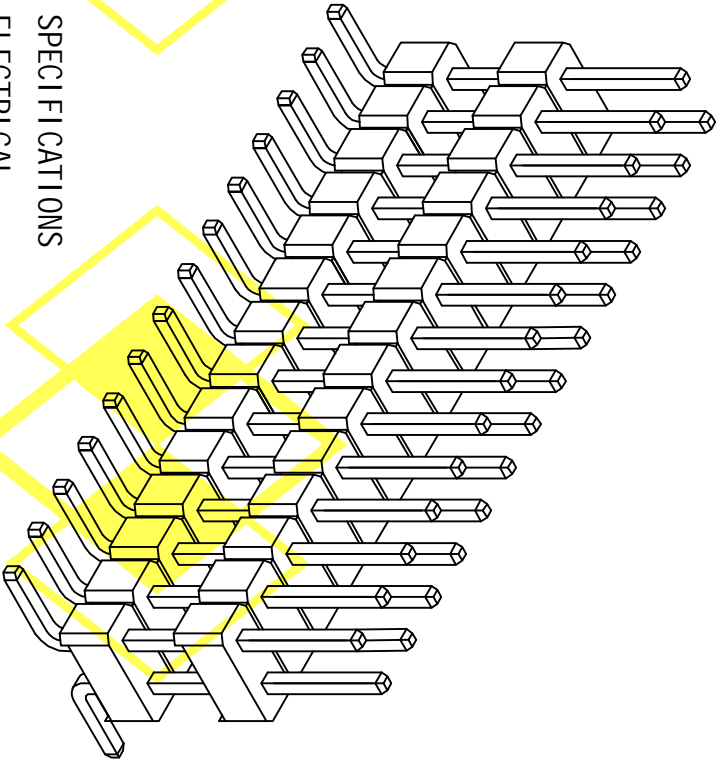

CENTRONIC PRECISION ELECTRONIC COMPANY MORLINKOM TECHNOLOGY LTD
 三川精密電子有限公司 魔林科技有限公司
 TEL:886-2-2686-8788 FAX:886-2-2686-0018
 E-MAIL: Centron@pts6.seed.net.tw E-MAIL: Cen8888@gmail.com

繪圖 DRAWN BY FU FU	日期 DATE 2010/07/08	圖號 98-XX-XX
核對 CHECKED BY WENDY	比例 SCALE 1:1	
SPHS2XXGB1XX		DRAWING NO.