


ORDERING INFORMATION

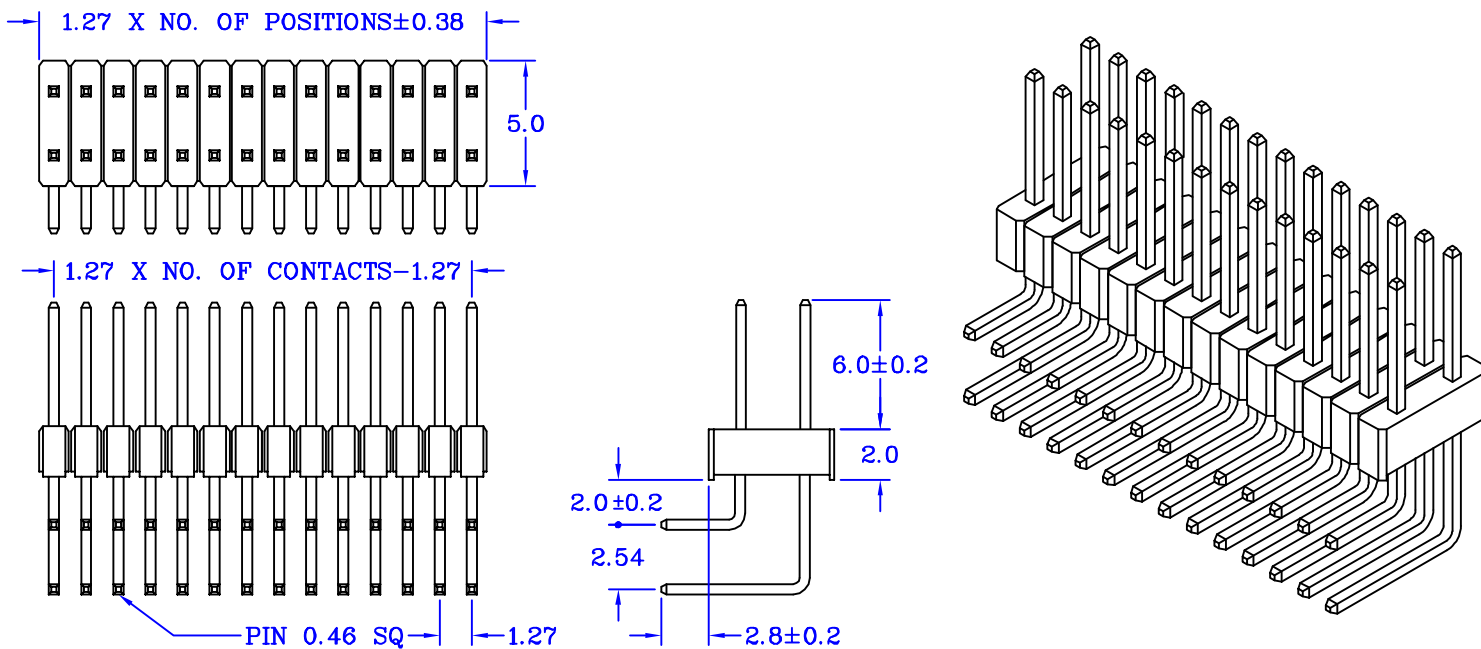

SERIES	1	2	3	4	5	6	7	8

Series

PH : Pitch 2.54mm Pin Header
 SPH : Pitch 2.54mm Pin Header SMT Type
 PPH : Pitch 2.54mm Pin Header Dual Body Type
 PHA : Pitch 2.54mm Pin Header Base Type
 HPH : Pitch 2.0mm Pin Header
 SHPH : Pitch 2.0mm Pin Header SMT Type
 PHPH : Pitch 2.0mm Pin Header Dual Body Type
 HPHA : Pitch 2.0mm Pin Header Base Type
 HHPH : Pitch 1.27mm Pin Header
 SHHPH : Pitch 1.27mm Pin Header SMT Type
 HHPPH : Pitch 1.27mm Pin Header Dual Body Type

1. Terminal Type

S : Straight Termination
 R : Right Angle Termination

2. Row Type

1 : Single Row 2 : Dual Rows 3 : Triple Rows

3. No. of Contacts

Single Row : 01 ~ 40 Contacts
 Dual Rows : 04 ~ 80 Contacts In Total
 Triple Rows : 09 ~ 120 Contacts In Total

4. Plating Option

G : Gold Plated (Standard)
 T : Tin Plated
 S : Selective Plated

5. Products Logo

A : Custom-Made
 B : Without Logo (Standard)

6. Insulator Color

1 : Black (Standard)

7. Special Option

Blank : Row Width and Pitch 1.27mm Outside
 H : Row Width and Pitch 1.27mm Square Pin 0.4mm
 P : With Locating Peg

8. Pin Length

00-999 : Custom-Made

EXAMPLE : HHPH R 2 24 G B 1 H 00

Pitch 1.27mm Pin Header Right Angle Termination
 Dual Rows 24 Pin(2 x 12 Pin) Gold Plated Without Logo
 Insulator Color Black Row Width and Pitch 1.27mm Square Pin 0.4mm

Morlinkom Technology Ltd.