


SPECIFICATIONS

ELECTRICAL

- Contact Current Rating : 3 Amperes
- Contact Resistance : 10 mΩ Max
- Insulator Resistance : 5,000 MΩ Min
- Operating Voltage : 100V AC/DC
- Dielectric Withstanding Voltage : 1,000V AC RMS 60 Seconds

MATERIAL

- Insulator : PPS, UL 94V-0
 - Contact : Beryllium Copper (BeCu)
 - Contact Plated : Selective Gold Plated Over Nickel
- Operation Temperature : - 40°C to + 105°C

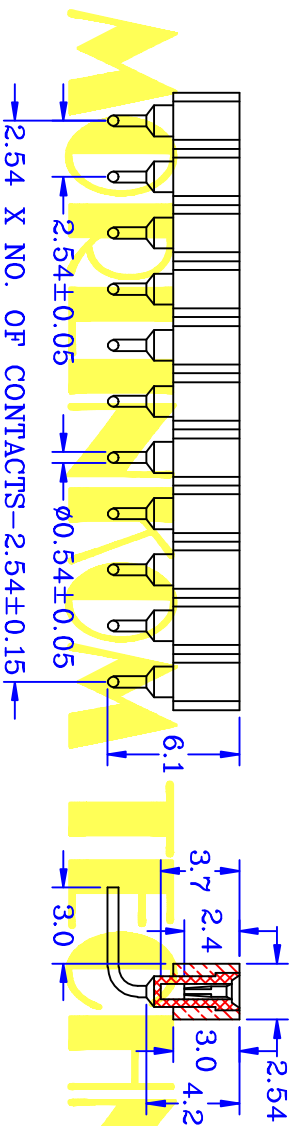

UNIT: mm

CENTRONIC PRECISION ELECTRONIC COMPANY
 三川精密電子有限公司
 TEL:886-2-2686-8788 FAX:886-2-2686-0018
 E-MAIL:Centronictpts@seed.net.tw

MORLINKON TECHNOLOGY LTD
 鹿林科技有限公司
 E-MAIL:Cent8888@gmail.com

繪圖	DRAWN BY	日期	DATE
核對	CHECKED BY	比例	SCALE
	WENDY	1:1	

PPR1XXSB1

圖號 144-XX
 DRAWING NO.