

SPECIFICATIONS


ELECTRICAL

- Contact Current Rating : 1.5 Amperes
- Contact Resistance : 30 mΩ Max
- Insulator Resistance : 1000MΩ Min
- Dielectric Withstanding Voltage : 500 V AC RMS 60 Seconds
- Operating Voltage : 150V AC Max

MATERIAL

- Insulator : PBT UL94V-0
 - Contact : Phosphor Bronze
 - Contact Plated : Gold Plated , Tin Plated , Selective Plated
 - Shield : Nickel Plated Brass Alloy
- #### MECHANICAL
- Insertion Force : 35Newtons Max
 - Extraction Force : 10Newtons Min
 - Durability(life test) : 1500 cycles

UNIT : mm

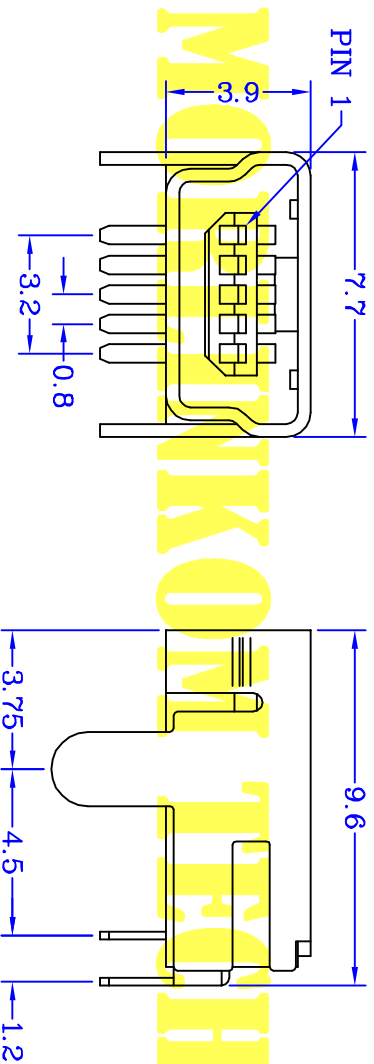

CENTRONIC PRECISION ELECTRONIC COMPANY

三川精密電子有限公司

TEL:886-2-2686-8788 FAX:886-2-2686-0018

E-MAIL: Centron@tpts6.seed.net.tw

MORLINKOM TECHNOLOGY LTD

魔林科技有限公司

FAX:886-2-2686-0018 E-MAIL: Cen8888@gmail.com

E-MAIL: Cen8888@gmail.com

繪圖	DRAWN BY	日期	DATE
FUFU	FUFU	2009/01/05	2009/01/05
核對	CHECKED BY	比例	SCALE
WENDY	WENDY	1:1	1:1

USB-BP-5B

圖號 930-BP-5B
DRAWING NO.